
Indoor Wall Panels Outdoor Wall Panels Composite Decking






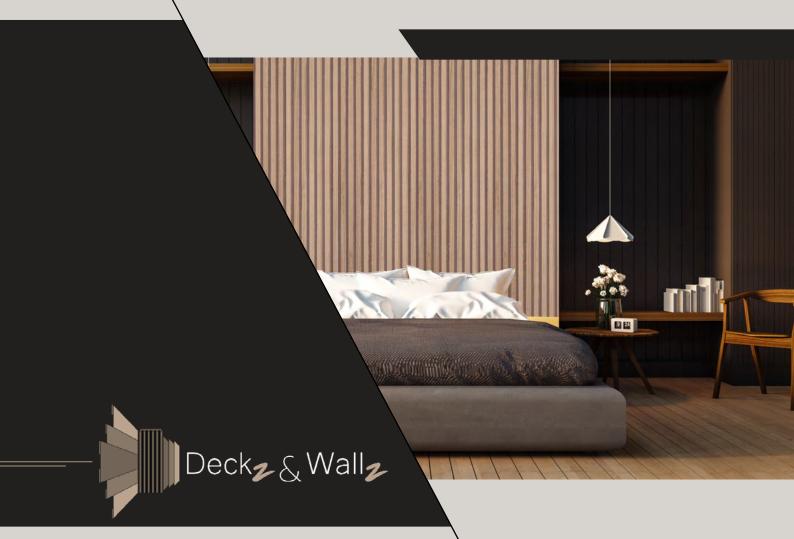

CONTENTS PAGE

Indoor Wall Panelling	Page ·
Auric	Page
Artistry	Page 6-
Opulence	Page 8-
Grandeur	Page 10-
Product Features	Page 1
Installation Guide	Page 1
Outdoor Wall Panelling	Page 1
Vertex	Page 1
Pinnacle	Page 16-1
Product Features	Page 1
Installation Guide	Page 1
Composite Decking	Page 2
Meridian	Page 2
Paragon	Page 2
Installation Accessories	Page 2
Product Features	Page 2
Installation Guide	Page 2
Stockists	Page 2
Warranty Information	Page 2

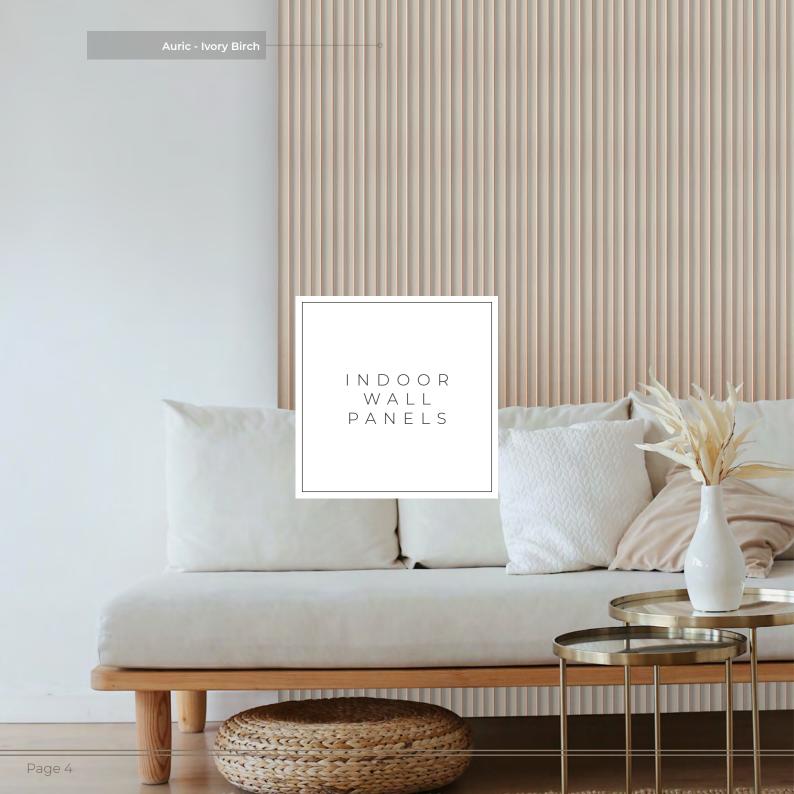








Composition	Percentage of Content
HIPS	10%
EPS	86.99%
Color Masterbatch	1%
Foil	<=0.01%
Flexibilizer	2%


Product Specifications:



Dimensions	145 x 12 mm
Standard Length	2.9 m
Mass /m	0.58 kg
Mass /length	1.68 kg
Planks /m²	2.38
Coverage /m²	6.90

Optional Extras:

Indoor Edging Strip



Page 5


1 Auric Ivory Birch

2 Auric
Rosa Birch



2 Auric Silver Birch



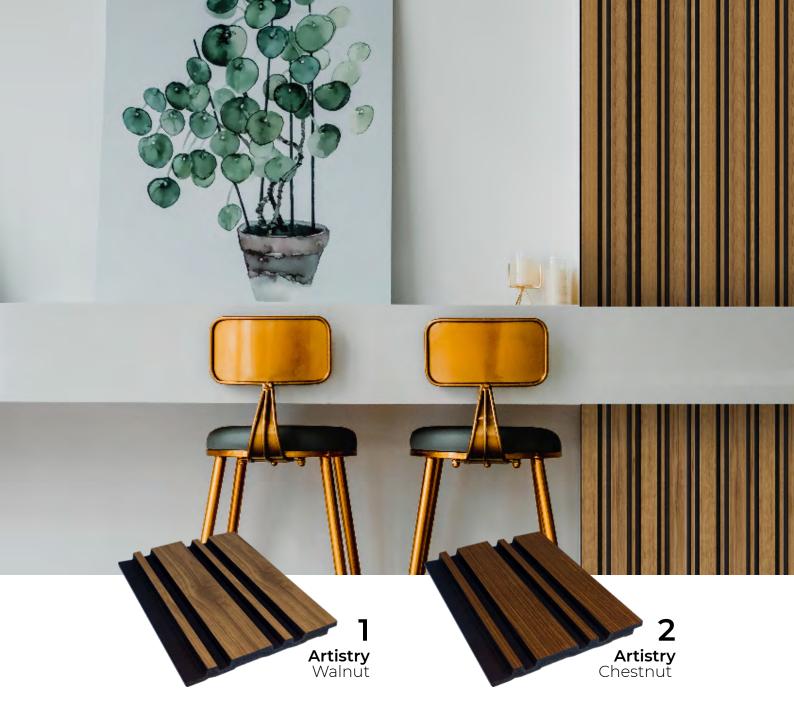

Artistry

Composition	Percentage of Content
HIPS	10%
EPS	86.99%
Color Masterbatch	1%
Foil	<=0.01%
Flexibilizer	2%

Product Dimensions:





Dimensions	117 x 12 mm
Standard Length	2.9 m
Mass /m	0.47 kg
Mass /length	1.36 kg
Planks /m²	2.95
Coverage /m²	8.55

Optional Extras:


Indoor Edging Strip









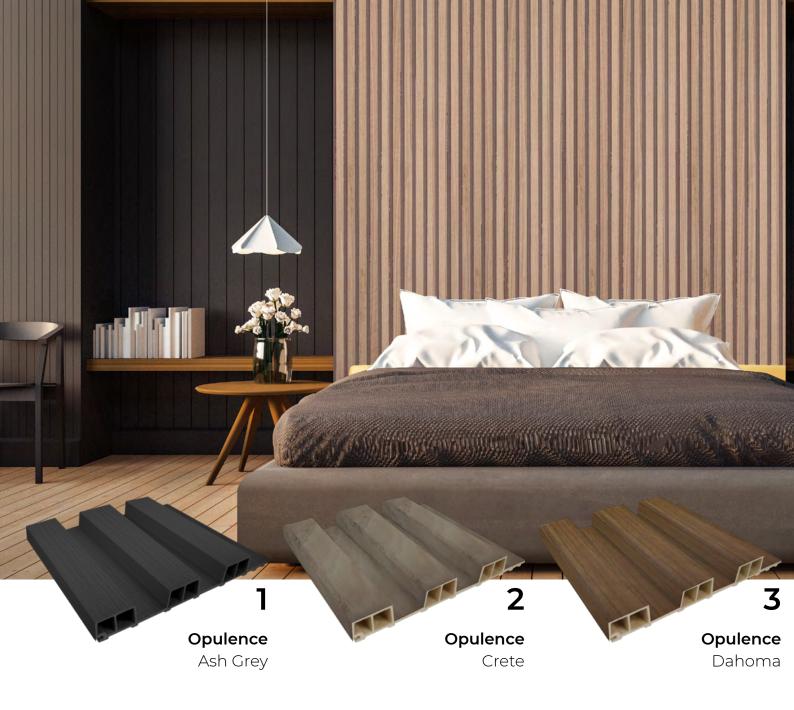



Opulence

Monza

Product Specifications:

Composition	Percentage of Content
PVC Powder	40%
Calcium Powder	58%
Additives	2%

Product Dimensions:



Dimensions	175 x 21 mm
Standard Length	2.9 m
Mass /m	1.08 kg
Mass /length	3.13 kg
Planks /m²	1.97
Coverage /m²	5.71





White Oak

Opulence




GrandeurAsh Grey



2 Grandeur Crete



Grandeur Dahoma

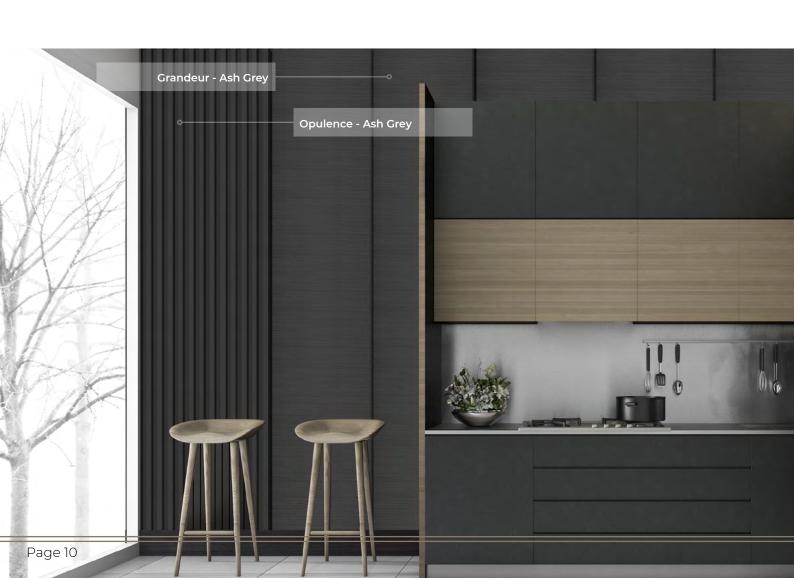



4 Grandeur Monza



5 Grandeur Pecan



6 Grandeur White Oak



Composition	Percentage of Content
PVC Powder	40%
Calcium Powder	58%
Additives	2%

Product Dimensions:

395



Dimensions	395 x 9 mm
Standard Length	2.9 m
Mass /m	2.09 kg
Mass /length	6.06kg
Planks /m²	0.87
Coverage /m²	2.53



PRODUCT FEATURES

Indoor Wall Panelling

	Indoor PS	Indoor PVC
Waterproof *:	√	✓
Easy to Install	✓	✓
Anti-moth	✓	✓
Eco-friendly	√	✓
Scratch Resistant	√	✓
Non-porous	√	✓
Non-formaldehyde (CH2O)	✓	✓
Fire Rated	N/A	✓
Easy to Clean	√	✓

INSTALLATION GUIDE

Indoor Wall Panelling

Equipment Needed



Wall Panelling



Coordinating Moulds




Circular Saw



Tape Measure



Nail Free Glue




Preparation of surface: A plastered or plywood surface is suggested for panel installation. Ensure that wallpapers are removed prior to installation.



A circular saw is recommended for cutting/resizing panels.


TO DOWNLOAD INSTALLATION

FILE




Thereafter apply a quick dry, nail free adhesive/glue to the back of the panel surface.






Apply to desired wall in either a horizontal or vertical orientation as preferred.



For corners, grooves should be aligned at a 90° angle.





Co ordinating moulds can be used as edging














Composition	Percentage of Content
Wood Flour	60%
Recycled PE	30%
Additives: Colourants Anti-oxidants Anti-Ultraviolet Agent Lubricants etc.	10%


Product Dimensions:



Dimensions	205 x 26 mm
Standard Length	2.9 m
Mass /m	2.86 kg
Mass /length	8.29 kg
Planks /m²	1.68
Coverage /m²	4.88

Optional Extras:

Outdoor Edging Strip



Page 15


- Vertex
 - Ancient Wood
- Vertex 2 Rosewood
- **3** Vertex Silver Grey
- 4 Teak





Composition	Percentage of Content
Wood Flour	60%
Recycled PE	30%
Additives: Colourants Anti-oxidants Anti-Ultraviolet Agent Lubricants etc.	10%


Product Dimensions:



Dimensions	125 x 21 mm
Standard Length	2.9 m
Mass /m	1.70 kg
Mass /length	4.93 kg
Planks /m²	2.76
Coverage /m²	8

Optional Extras:

Outdoor Edging Strip



Teak

2 Pinnacle Coffee

PinnacleLight Grey



PRODUCT FEATURES

Outdoor Wall Panelling



INSTALLATION GUIDE

Outdoor Wall Panelling




Equipment Needed







Place at a desired level.



Position keels 30cm to 40cm apart horizontally.


















Mount the fitting using stainless steel screws.



Insert a starter clip at the edge of each keel.




Slide the first wall panel along the starter clip firmly.




Thereafter install the rest of the panels by aligning and clipping it into the first wall panel.





Finish by securing edging using stainless steel screws.



Final Result.

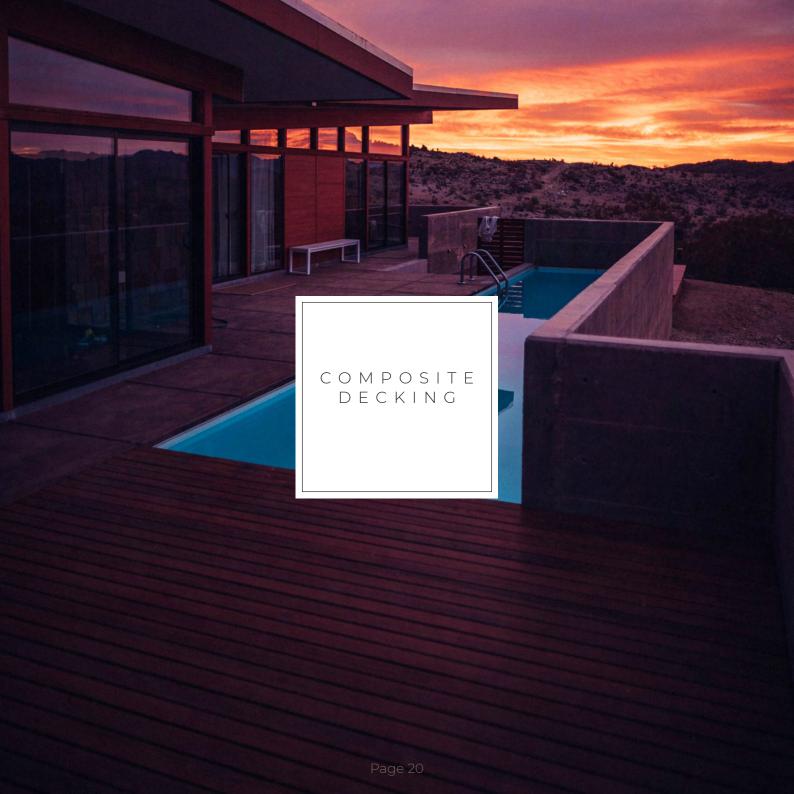

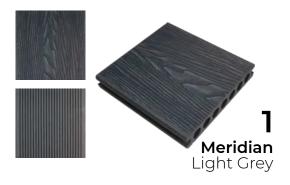

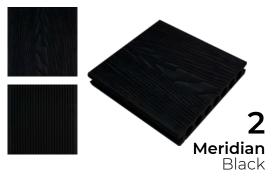






Product Specifications for Meridian & Paragon:

Composition	Percentage of Content
Wood Flour	60%
Recycled PE	30%
Additives: Colourants Anti-oxidants Anti-Ultraviolet Agent Lubricants etc.	10%

Product Dimensions for Meridian & Paragon:



Dimensions	148 x 23 mm
Standard Length	5.8 m
Mass /m	2.75 kg
Mass /length	15.95 kg
Planks /m²	1.17
Coverage /m²	6.76

Embossed Decking:

Dual sided pattern extrusion for your preferred pattern of installation.
















Co-Extrusion Decking:

Dual sided colour extrusion for your preferred colour of installation.

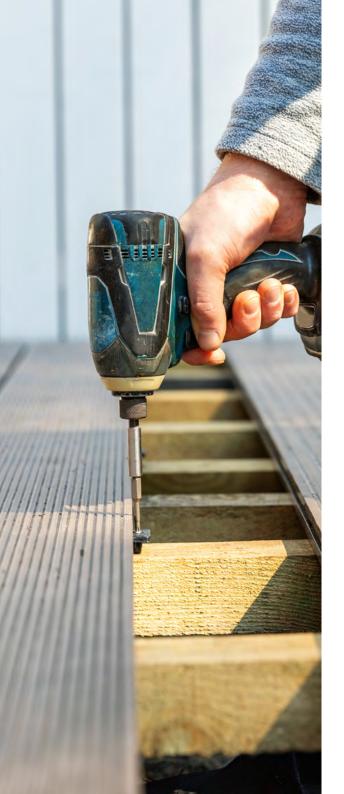

Installation Accessories:



Outdoor Panelling Support/Keel 2900x40x25



Outdoor Panelling Stainless Steel Clips



Outdoor Panelling Stainless Steel Starter Clips



Outdoor Panelling Stainless Steel Screws



Outdoor Panelling Stainless Steel Expansion Screws



Indoor & Outdoor Panelling Wallz and Deckz Adhesive 280ml

PRODUCT FEATURES

Composite Decking







Anti-corrosion

Waterproof




Eco-friendly



Weather Rated



Non-formaldehyde



Easy to Install



Scratch Resistant



Anti-moth



Non-heavy Metal

INSTALLATION GUIDE

Composite Decking





You will need a drill, an electric screwdriver and a saw in addition to the accessories provided during installation. Ensure that you work on a level/stable surface that is solid enough for inserting expansion screws

Predrill the area on the ground before driving in expansion screws. Make sure that the allocation for holes on the keels match the predrilled area on the ground.



The recommended space hetween keels are 40cms



Insert a starter clip at the edge of each keel with a stainless-steel screw





Slide the first Decking board against the starter clip firmly.



Thereafter install spacer clips to the other edge of the board and fix with stainless steel screws.

6



Make sure the screw holes are aligned with the centre of the keel Slide Decking boards against spacer clips and install the rest of the boards in the same manner as step 5.



Joints need to be positioned over the centre of the keel or add extra keels to support joints.

8



Decking can be completed by installing the coordinating mould side cover along edges.

STOCKISTS NATIONWIDE

Gauteng

Johannesburg Midrand

Mpumalanga

Nelspruit Trichardt

Northwest and Free State

Klerksdorp

Eastern Cape

Port Elizabeth

Kwa Zulu Natal

Durban Pietermaritzburg

Limpopo

Polokwane

